




GM-Mounting type 10-GM-1300-A


Max. 1200 kg - 8 mm - 5.5 Hz

GM-Mountings are very suitable for stationary and mobile applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration and acoustic insulation. The integrated rebound control -device limits excessive movement under external loads. GM -Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature and are also available with M12 and M20 inner thread.

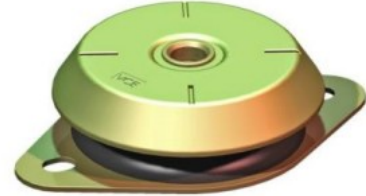


Applications: generator sets, pump units, compressor sets, etc.

LOAD CHARACTERISTICS

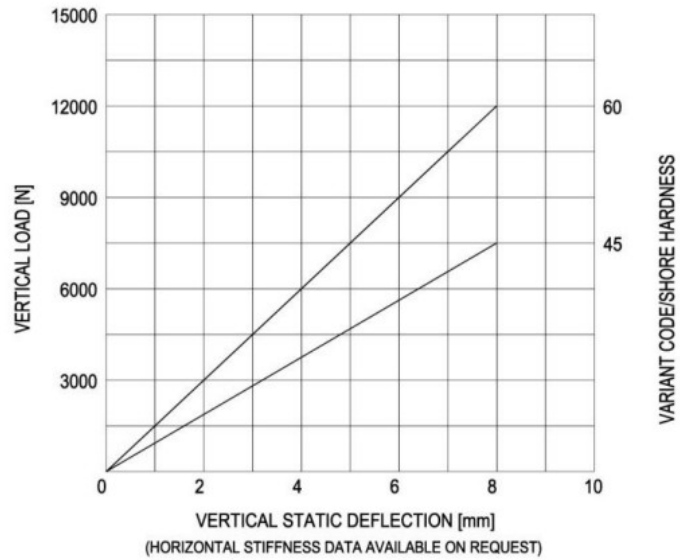

SIDE-VIEW

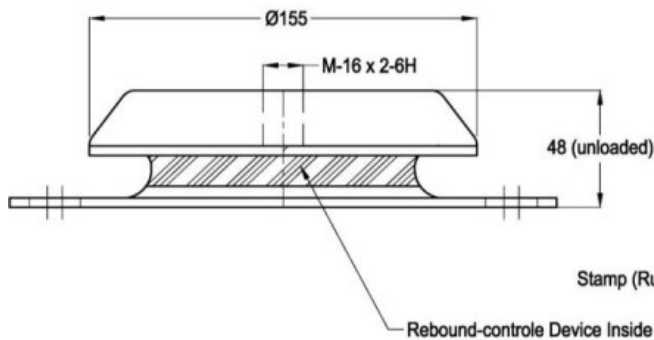

TOP-VIEW

